

Pipe, small Vessel or Shell Grinding Head MS-230



Application

The MS-230 is used for the following applications:

- the internal grinding of surfaces on small pipes and vessels
- the grinding of internal longitudinal and circumferential weld seam reinforcements

Technology

Grinding pressure, it's precise adjustment with a pneumatic control. It's allow some floating, the grinding head follows automatically any run-outs of the work piece with constant pressure. The power is transmitted by a shaft drive from the motor to the grinding head.


The belt change requires only a few manipulations.

The MS-230 can be equipped with grinding belts as well as polishing rings, wire brushes, flap wheels, Scotch-Brite-discs and belts.

Performance

Any desired surface finish can easily be achieved by using finer and finer grain of belts.

Pipe, small Vessel or Shell Grinding Head MS-230

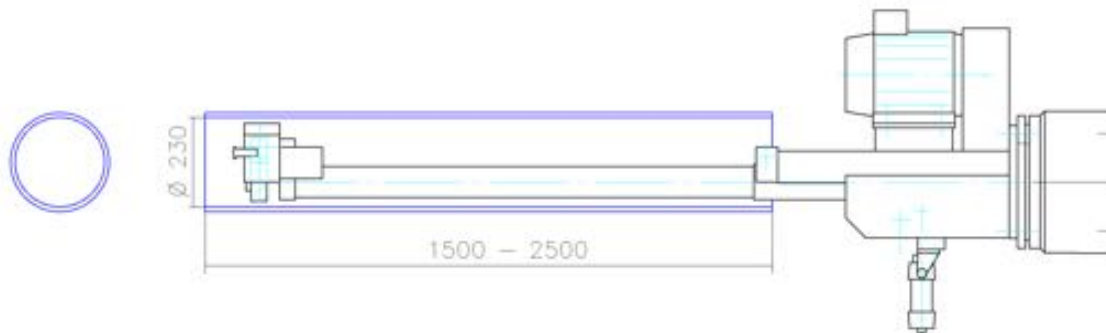

Technical Data

smallest internal diameter to be ground
with standart model, without dust extraction

ø 230 mm

smaller diameter needs some clarification

standard grindable length

1500 to 2500 mm

